


ITEM	SYMBOL	MIN.	MAX.	UNIT
POWER SUPPLY(VDD)	V _{DD}	-0.3	7.0	V
INPUT VOLTAGE	V _i	-0.3	VDD+0.3	V
OPERATING TEMP	T _{op}	-20	+70	°C
STORAGE TEMP	T _{st}	-30	+80	°C

ITEM	STANDARD VALUE
Display Type	128 x 128 Dots
LCD Type	FSTN
Drive Method	1/128Duty, 1/12Bias, VOP16.5V
Viewing Angle	6 0'clock
Backlight Color	White
Control IC	UC1698U

Driver Diagram

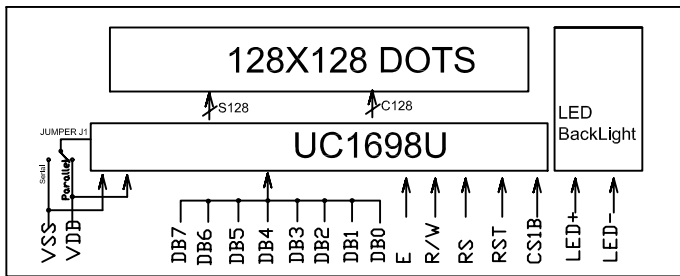

PIN DESCRIPTION			
PIN	SYMBOL	LEVEL	FUNCTION
1	VSS	0V	Ground
2	VDD	H	Power Supply For Logic
3	CS	--	Power Supply For LCD
4	CD	H/L	H:Data L:Instruction Code
5	WR	L	Write Signal
6	RD	H	READ Signal
7-14	DB0-DB7	H/L	Data Bus
15	RST	L	Reset Signal
16	LEDA	H	Backlight Anod