
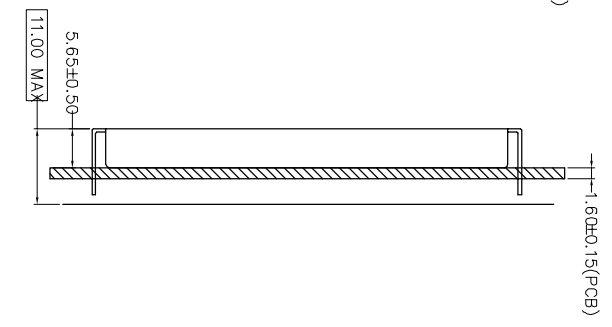


PIN DESCRIPTION

NO.	SYMBOL	DESCRIPTION
1	GND	
2	VDD	
3	V0	
4	A0	
5	RD	
6	WR	
7	D0	
8	D1	
9	D2	
10	D3	
11	D4	
12	D5	
13	D6	
14	D7	
15	CS	
16	RST	
17	BLA	
18	BLK	

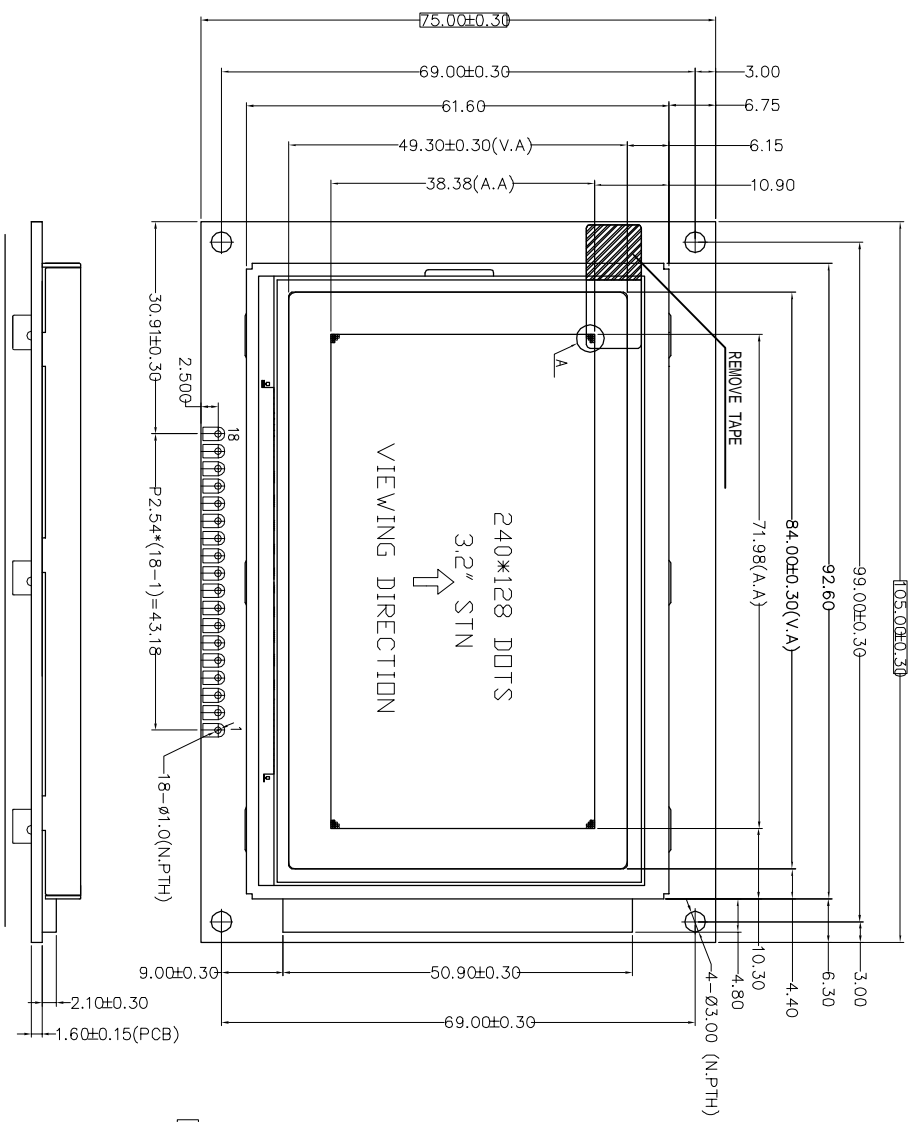

SCALE: 10:1

NOTES:

- 1.DISPLAY TYPE: STN/BLUE
- 2.VIEWING DIRECTION: 600
- 3.POLARIZER MODE: NEGATIVE/TRANSMISSIVE
- 4.DRIVE METHOD: 1/128 DUTY/1/2 BIAS
- 5.BACKLIGHT: WHITE LED, Vf=5V If=65-85 mA
- 6.OPERATING VOL.TAGE: VLCD=15V, VDD=3V
- 7.CONTROLLER: UC1608
- 8.OPERATING TEMP: -20°C TO 70°C
- 9.STORAGE TEMP: -30°C TO 80°C
- 10.UNMARKED TOLERANCE: ±0.30
- 11.CONTROL DIMENSIONS:
- 12.REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

NANJING XIHENG ELECTRONICS&TECHNOLOGY CO., LTD

DRAWN BY:	LC0D NO: TM240128WFTW0VA G-1	
CHECKED BY:	DWG NO: TM240128WFTW0VA G-1	
APPROVED BY:	SCALE:	UNIT: MM
CONFIRMED BY:	CUSTOMER NO:	SHEET NO: 1 OF 3