

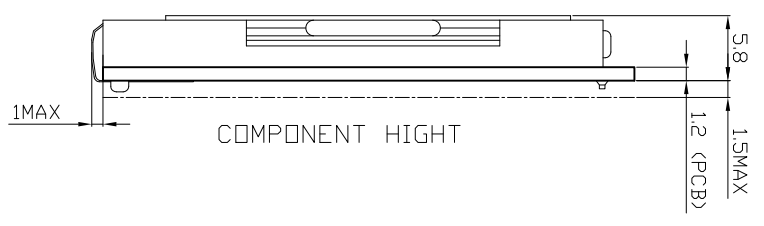


FOR REFERENCE ONLY

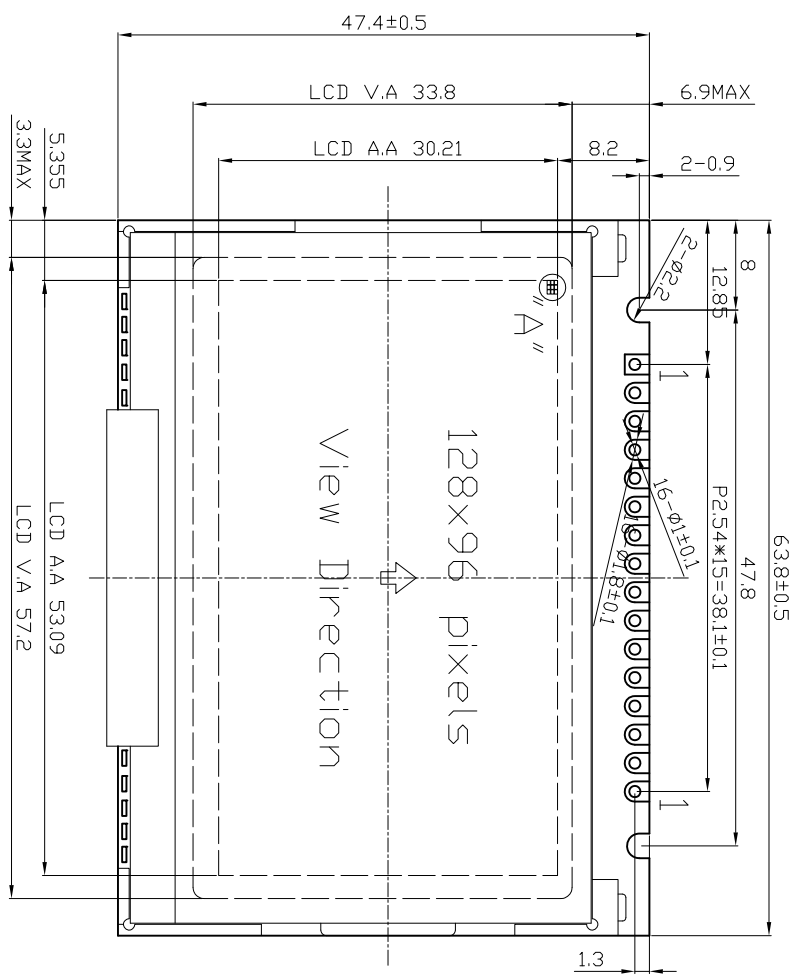


No: PIN NAME


1	/CS
2	/RST
3	RS
4	/WR(R/W)
5	/RD(E)
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6(SSCLK)
13	DB7(SID)
14	VDD
15	VSS
16	BLA

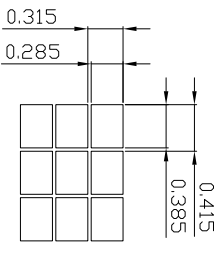

DETAIL "A" (S=10:1)



Wiring Details  
Top View

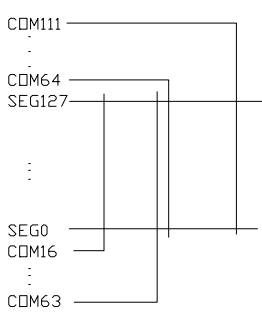

\*產品符合ROHS要求\*

ITEM	
LCD Type	FSTN
Viewing Direction	6 o'clock
	DUTY:1/96 BIAS:1/10
Operating Voltage	Positive/Transflective
	3.3 V
Operating Temp.	-20°C ~ 70°C
Storage Temp.	-30°C ~ 80°C
Connector(C)	NT7506

REVISIONS	DESCRIPTION	DESIGNED	DATE	CHECKED	APPROVED

UNITS	SCALE	TOLERANCE	QTY	PROJECT NO:
mm	FREE	±0.2	1	LCM12896B
APPROVED:	CHECKED:	DESIGNED:		LCM NO:
				LCM12896B-1

NANJING XIHENG ELECTRONIC&TECHNOLOGY CO., LTD